


1			2			3			4			5			6			7			8		
REVISIONS																							
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE																					

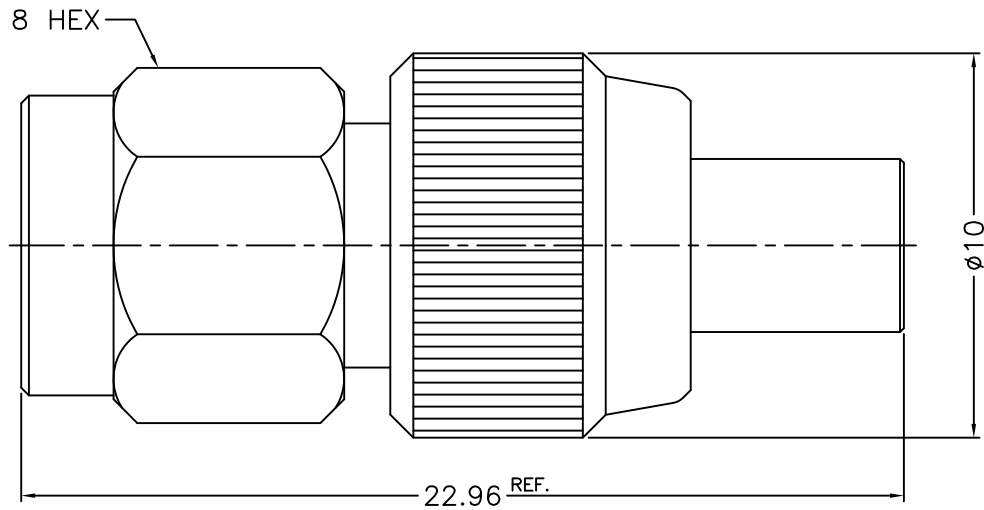

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS
2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. TEFLON

RoHS COMPLIANT

8	GASKET	SILICONE	RED	1	GS-43-60-06
7	RETAINER RING	SUS 304	NATURAL	1	1436-1000-4
6	BODY	NOTE 1	NOTE 2	1	100-MCXF-4
5	CONTACT PIN	NOTE 3	NOTE 4	1	100-SMAM-MCXF-5
4	INSULATOR	NOTE 5	NATURAL	1	100-SMAM-3-50T
3	INSULATOR	NOTE 5	NATURAL	1	100-MCXF-5-50T
2	HOUSING	NOTE 1	NOTE 2	1	100-SMAM-SMBM-2
1	SHELL	NOTE 1	NOTE 2	1	1436-1000-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±	0.2
6-30	=	±	0.4
30-120	=	±	0.6
120-315	=	±	1
315-1000	=	±	1.6
1000-2000	=	±	2.4
SCALE	5/1	ISSUE	A

PART NO.	
APPROVED	DATE 11-18-'15
CHECKED	DATE 11-18-'15
DRAWN	DATE 11-18-'15

G.L.I.	
TITLE SMA PLUG TO MCX JACK ADAPTOR	
DRAWING NO. 100-SMAM-MCXF-50	
FILE NO. R:\D\G\DWG\100\SMAM-MCXF\50	

1			2			3			4			5			6			7			8		
---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--