

1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A1	D-4	ø6 WAS ø5.9\N/A\06-15-'15

F



E

D


C

B

A

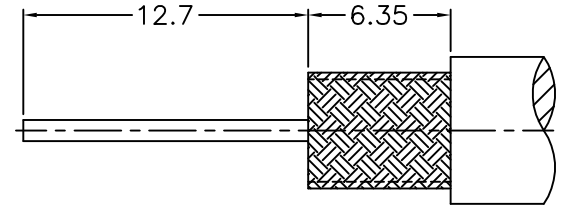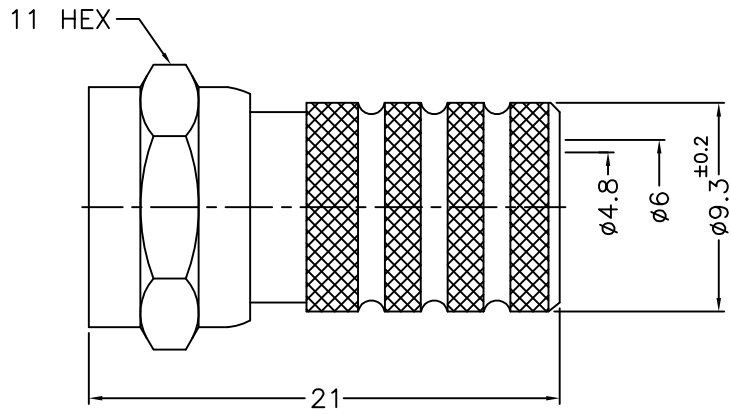

RECOMMENDED  
CABLE STRIPPING DIM'S  
(STEP 1)  
(建議剝線尺寸 步驟一)

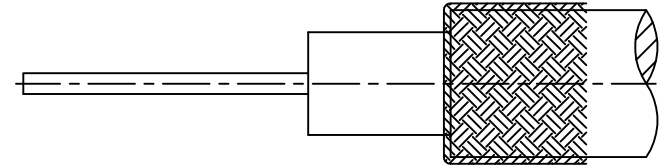

(STEP 2)  
(建議剝線尺寸 步驟二)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
1. ZINC  
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK

RoHS COMPLIANT

尺寸單位為 mm		PART NO.		G.L.I.	
一般公差 0.5-6 = ±0.1 6-30 = ±0.2 30-120 = ±0.3 120-315 = ±0.5 315-1000 = ±0.8 1000-2000 = ±1.2 ANGLES = ±3°		APPROVED DATE 06-15-'15			
		CHECKED DATE 06-15-'15		TITLE F TWIST-ON PLUG (FOR RG-6U)	
		DRAWN DATE 06-15-'15		DRAWING NO. 3832D-1131A2-15-75	
				FILE NO. R:\D\G\DWG\3832\D\1131A2\15\75	

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
2	BODY			1	3832D-1131A2-15
1	SHELL			1	3832D-1131A1-1

1 2 3 4 5 6 7 8