



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

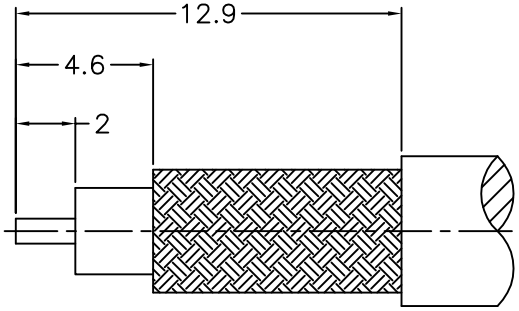

RECOMMENDED
CABLE STRIPPING DIM'S
（建議剝線尺寸）

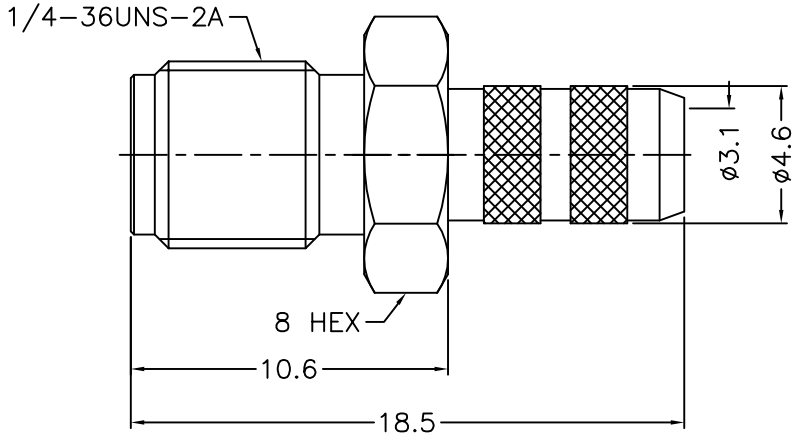



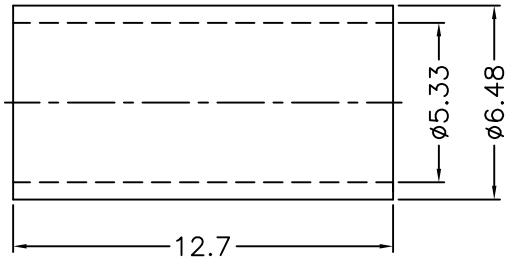

NOTES: FINISH (PLATING THICKNESS IN MICRO–INCHES)
1. BRASS
2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. TEFLON

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
4	FERRULE	COPPER	NOTE 2	1	FR–533–648–127C
3	CONTACT PIN	NOTE 3	NOTE 4	1	1436–6111A3–3 –0.9
2	INSULATOR	NOTE 5	NATURAL	1	1436–6111A3–2 –50T
1	BODY	NOTE 1	NOTE 2	1	1436–6111A3–1 –06

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5–6 = ±0.2
6–30 = ±0.4
30–120 = ±0.6
120–315 = ±1
315–1000 = ±1.6
1000–2000 = ±2.4

SCALE 4/1 ISSUE A

PART NO.

APPROVED DATE 08–15–'12

CHECKED DATE 08–15–'12

DRAWN ANGELA DATE 08–15–'12

G.L.I.

TITLE
SMA CRIMP JACK
(FOR RG–58, 58A, 141 CABLE)

DRAWING NO.
1436–6111A3–06–50

FILE NO. R:\D\G\DWG\1436\6111A3\06\50