




A TYPE

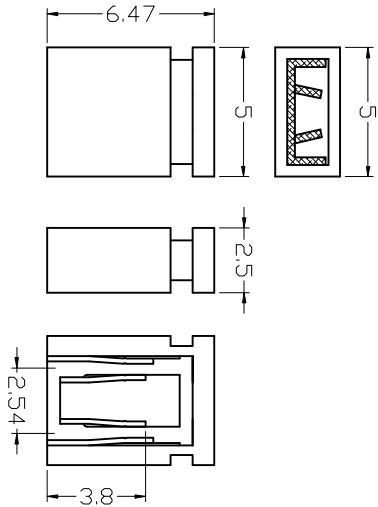


B TYPE

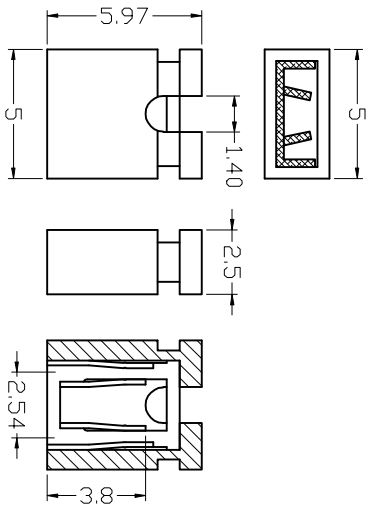

C TYPE

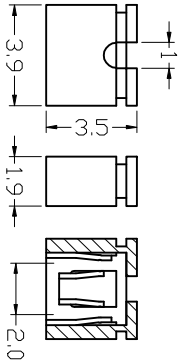

D TYPE

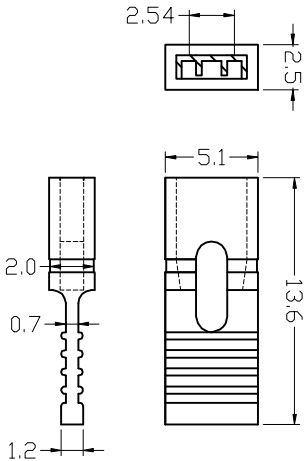

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 1AMP

Dielectric Withstanding
Voltage: AC 500V For 1 minute
Operating Temperature:-55°C--+105°C
Contact: Phosphor bronze
Housing: PBT 830% Glass Fiber(UL 94V-0)

设计/Designed by		审核/Reviewed by		审批/Approved by		批准/Approved by		备注/Remarks		单位/Units	
				图名/Name		文件编号/rev.no					
				116产品图		页序/revise					