

Switch

Tact Switch Series



TS6601 6x6 Tact Switch Series

ELECTRICAL

- 1. Rating: 50mA 12VDC
- 2. Contact Resistance : 50mΩ max(initial)
- 3. Insulation Resistance: 100MΩ(minDC 250V)
- 4. Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5. Electrically Life: 100000cycles
- 6. Environment temperature:-20°C~+70°C
- 7. Operating Force: 180/250(±30gf)
- 8. Seal temperature:260°C~ 280°C
- 9. operating temperature:-40°C~+85°C



Dimension (unit: mm)

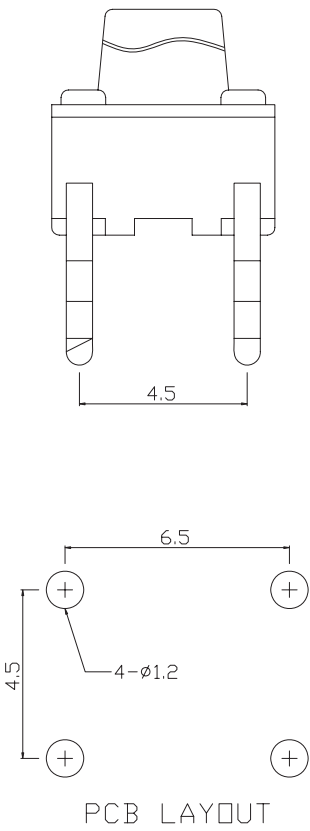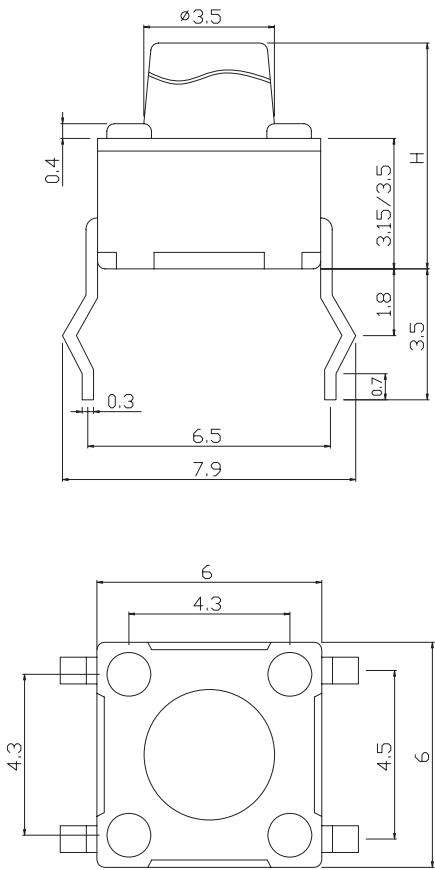

H
4.3
5.0
7.0
7.3
7.5
8.0
9.5
11.0
12.0
13.0
15.0
17.0
18.0
20.0
22.0
26.0

ORDER INFORMATION

TS6601 - 4.3 - 180

Series No. Operating Force : 180~250gf

Hight: 4.3mm/5.0mm/7.0mm/7.3mm/
7.5mm/8.0mm/9.5mm/11.0mm/
12.0mm/13.0mm/15.0mm/17.0mm/
18.0mm/20mm/22mm/26mm